

# FEATURED PRODUCT - SERIES ERD



**DIN-RAIL MOUNTABLE**

The Family of ERD Models

**ERD MODEL TABLE (-24, 24V Input; -48, 48V Input)**

MODEL	OUTPUT VOLTAGE		OVP SETTING	OUTPUT CURRENT			CURRENT LIMIT	RIPPLE		NOISE (SPIKE)	EFFICIENCY
	Volts		Volts	Amps			Amps	mV		mV	Percent
	Factory set, (1)	Adjustment range	Nom input 25°C	50°C	60°C	71°C	25°C Nom input rectangular fixed	Nom input max load typ	p-p max	d-c to 50MHz	Nom input max load typ
<b>30 WATT MODELS</b>											
ERD 5-6-24 ERD 5-6-48	5	4.0~5.5	6.0~6.9	6.0	4.2	2.4	6.6~7.1	30	50	100	77%
ERD 12-2.5-24 ERD 12-2.5-48	12	8.4~13.2	13.7~15.7	2.5	1.8	1.0	2.8~3.1	50	80	170	
ERD 15-2-24 ERD 15-2-48	15	12.0~16.5	17.0~19.5	2.0	1.4	0.8	2.3~2.6	50	80	200	
ERD 24-1.3-24 ERD 24-1.3-48	24	16.8~26.4	27.0~30.5	1.3	0.9	0.5	1.5~1.8	50	100	290	
ERD 48-0.6-24 ERD 48-0.6-48	48	32.6~52.8	55.0~63.0	0.6	0.4	0.2	0.7~1.0	60	150	530	
<b>60 WATT MODELS</b>											
ERD 5-12-24 ERD 5-12-48	5	4.0~5.5	6.0~6.9	12.0	8.4	4.8	13.2~13.8	30	50	100	24V input: 79% 48V input: 82%
ERD 12-5-24 ERD 12-5-48	12	8.4~13.2	13.7~15.7	5.0	3.5	2.0	5.6~6.0	50	80	170	
ERD 15-4-24 ERD 15-4-48	15	12.0~16.5	17.0~19.5	4.0	2.8	1.6	4.5~4.9	50	80	200	
ERD 24-2.5-24 ERD 24-2.5-48	24	16.8~26.4	27.0~30.5	2.5	1.8	1.0	2.8~3.1	50	100	290	
ERD 48-1.2-24 ERD 48-1.2-48	48	32.6~52.8	55.0~63.0	1.2	0.8	0.5	1.4~1.7	60	150	530	
<b>150 WATT MODELS</b>											
ERD 5-30-24 ERD 5-30-48	5	4.0~5.5	6.0~6.9	30.0	21.0	12.0	33.0~35.0	30	50	100	24V input: 79% 48V input: 81%
ERD 12-12-24 ERD 12-12-48	12	8.4~13.2	13.7~15.7	12.0	8.4	4.8	13.4~14.4	50	80	170	
ERD 15-10-24 ERD 15-10-48	15	12.0~16.5	17.0~19.5	10.0	7.0	4.0	11.2~12.0	50	80	200	
ERD 24-6-24 ERD 24-6-48	24	16.8~26.4	27.0~30.5	6.0	4.2	2.4	6.8~7.3	50	100	290	
ERD 48-2.8-24 ERD 48-2.8-48	48	32.6~52.8	55.0~63.0	2.8	2.0	1.1	3.3~3.6	60	150	530	

(1) Nominal input, maximum load, 25°C

KEPCO, INC. • 131-38 Sanford Avenue • Flushing, NY 11352 USA • Tel: (718) 461-7000 • Fax: (718) 767-1102

Email: [hq@kepcopower.com](mailto:hq@kepcopower.com) • [www.kepcopower.com/erd.htm](http://www.kepcopower.com/erd.htm)

These are d-c to d-c converters operating at 300KHz. High frequency switching, plus extensive use of custom hybrid microcircuits with surface mount components, allows for low-profile mounting. The microcircuits afford high reliability by contributing to low parts count. The ERD are true transformer isolated power supplies whose output polarity is independent of the input. Available sizes: 30W, 60W, and 150W.

## FEATURES

- “Power-OK” LED.
- Remote on/off: TTL compatible signal applied to the optically isolated “RC” terminals.
- Remote error sensing: Compensates for voltage drops up to 0.4V per wire (0.25V in 5V model).
- Adjustable voltage: Internal trimmer accessible through the case allows manual adjustment of the voltage setting.
- Remote voltage control: Provision is made for an external resistor to trim the output voltage setting.
- Overvoltage protection: Power is shut off if output voltage is forced beyond the set limit.
- Rectangular current limiting so you can drive non-linear loads.
- Built-in EMI filter meets conducted noise standard of MIL-STD 461B.
- Safety: All models recognized by UL, certified by CSA and are certified to meet the MIL STD 810D Environment.
- Connections: Input and output connections are via screw terminal barrier strip.



ERD can be individually installed or may be combined into a custom power assembly for multi-output requirements. Please see pages 131-135 for details on Kepco's Power Assembly Program.



KEPCO, INC.

131-38 Sanford Avenue, Flushing, NY 11352 USA  
Tel: (718) 461-7000 • Fax: (718) 767-1102  
Email: [hq@kepcopower.com](mailto:hq@kepcopower.com)

114 [www.kepcopower.com/erd.htm](http://www.kepcopower.com/erd.htm)

## ERD GENERAL SPECIFICATIONS

SPECIFICATION		RATING/DESCRIPTION		CONDITION
Temperature		0-71°C (see model table)		Operating
		-40°C to +75°C		Storage
Humidity		95% RH		Non-condensing operating and storage
Shock		20g, 3 axes (11msec ±5msec pulse duration)		Non-operating 3 shocks each axis
		5-10Hz: 10mm amplitude, 3 axes		Non-operating 1 hour each axis
10-55Hz: 2g, 3 axes				
Isolation	Output to case	500V d-c, 100MΩ		25°C, 65% RH
Withstand Voltage	Input to output	2KV a-c for 1 minute		25°C, 65% RH
	Input to case	2KV a-c for 1 minute		
Safety		UL 478 recognized; CSA C22.2-154 certified		
Type of Construction		PC card, enclosed		
Enclosure		Aluminum		
Cooling		Convection		Vertical installation
		Use moving air (5 CFM), or derate by 20%		Horizontal installation

## ERD INPUT CHARACTERISTICS

SPECIFICATION	30 WATT MODELS		60 WATT MODELS		150 WATT MODELS		CONDITION
	24V	48V	24V	48V	24V	48V	
Voltage Range	20-30 V	40-56 V	20-30 V	40-56 V	20-30 V	40-56 V	
Current	typ	1.6A	0.8A	3.3A	1.6A	8.0A	3.8A
	max	1.8A	0.9A	3.5A	1.7A	8.5A	4.1A
	max	2.2A	1.1A	4.3A	2.1A	10.5A	5.0A
	max	0.15A	0.1A	0.15A	0.1A	0.15A	0.1A
Fuse Value	max	4.0A	2.5A	6.3A	4.0A	15.0A	8.0A
EMI	Meets conducted noise standard of MIL-STD 461B					Method CEO3 broadband	
Circuit Type	Forward converter						
Switching Frequency	300KHz (1)						Nominal input, rated load


(1) 24V 150W models: 220KHz

## ERD OUTPUT CHARACTERISTICS



SPECIFICATION		TYP	MAX	CONDITION
Source Effect		0.2%	0.8%	Minimum to maximum input
Load Effect		0.3%	1.0%	10% to 100% load
Temperature Effect		0.3%	1.0%	Nominal input maximum load, 0-50°C
Combined Effect, Source Load & Temperature		0.6%	2.0%	
Time Effect (drift)		0.1%	0.5%	0.5-8.5 hr maximum load, 25°C
Recovery Characteristics	Excursion	<4.0%		Nom input, 25°C; step load change from 50% to 100% of rated load.
	Recovery within ±1%	<1msec		

## OUTLINE DIMENSIONAL DRAWINGS



Fractional dimensions in light face type are in inches, dimensions in bold face type are in millimeters.

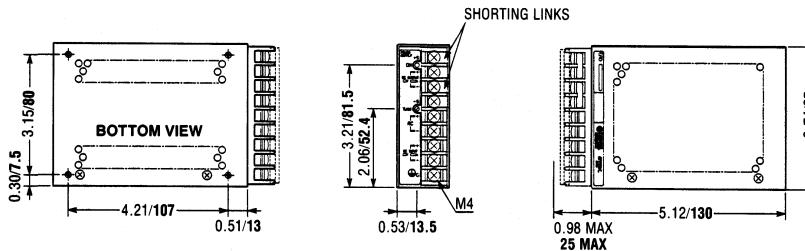

### ERD 30 WATT MODELS

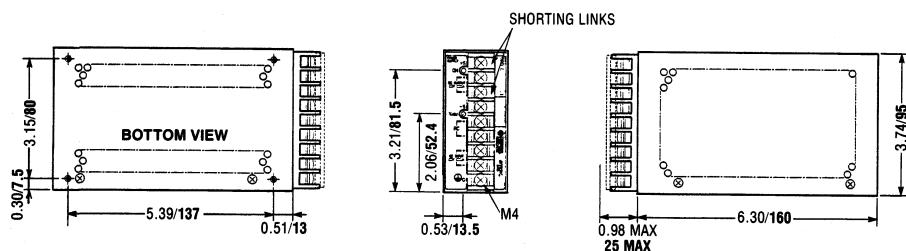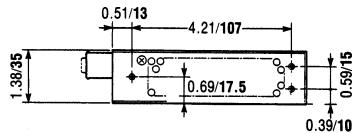

### ERD 60 WATT MODELS

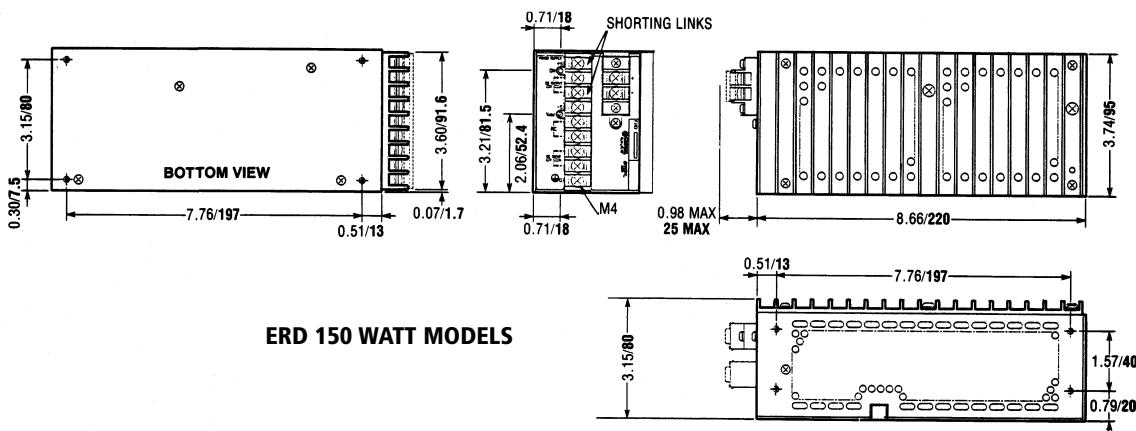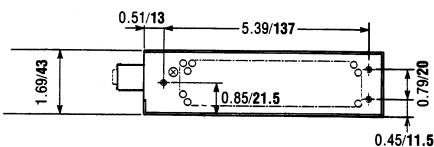

### DIMENSIONS

**30W** inches — 1.38 x 3.74 x 5.12<sup>(1)</sup>  
mm — 35 x 95 x 130

**60W** inches — 1.69 x 3.74 x 6.3<sup>(1)</sup>  
mm — 43 x 95 x 160

**150W** inches — 3.15 x 3.74 x 8.66<sup>(1)</sup>  
mm — 80 x 95 x 220

### NET WEIGHT

**30W** 0.9lbs, 0.40Kg  
**60W** 1.2lbs, 0.55Kg  
**150W** 2.6lbs, 1.20Kg

**Tolerances:** 0.028" (0.7mm) between mounting holes,  
0.04" (1.0mm) other dimensions.

#### Mounting:

**30W & 60W:** 8-32 tapped holes — (4) bottom, (3) each side;  
maximum screw penetration 0.24" (6mm).  
**150W:** 8-32 tapped holes — (4) bottom, (4) each side;  
maximum screw penetration 0.24" (6mm).

(1) Excluding barrier strip.