


INSTRUCTION SHEET



KEPCO An ISO 9001 Company.

RA 17-5

RA 17-5 RACK ADAPTER

I — DESCRIPTION.

This kit contains the hardware required to mount five PRM Size B-120 or size D-60 Series Power Supplies to a standard 19-inch equipment rack.

II — EQUIPMENT SUPPLIED

Table 1 lists the equipment supplied.

TABLE 1. EQUIPMENT SUPPLIED

Item	Quantity	Description	Kepco P/N
Panel	1	Allows installation of size B-120 and size D-60 PRM Series power supplies on standard 19-inch rack.	131-0464
Handle	2	Facilitates moving and installing rack adapter.	139-0103
Screw	4	Used to attach handle to panel (10-32 x 3/4, ST. FHS2).	101-0043
Ferrule	4	Used to reinforce handle to panel.	170-0001
Screw	20	Used to attach PRM power supply to panel (8-32 x 1-2, ST., THPH).	101-0029
Washer	20	Used to attach PRM power supply to panel (#8, rolled, nylon).	103-0068

III — ASSEMBLY

Mount each handle onto two ferrules (P/N 170-0001) and attach to the panel using four screws (P/N 101-0043) at mounting holes C (see Figure 1), Attach PRM power supplies to the panel using four screws (P/N 101-0029) and four washers (P/N 103-0068) for each power supply at mounting holes A.

IV — INSTALLATION

Mount the assembled rack adapter with the PRM power supplies attached to the 19-inch rack using hardware (not supplied) at mounting holes B.

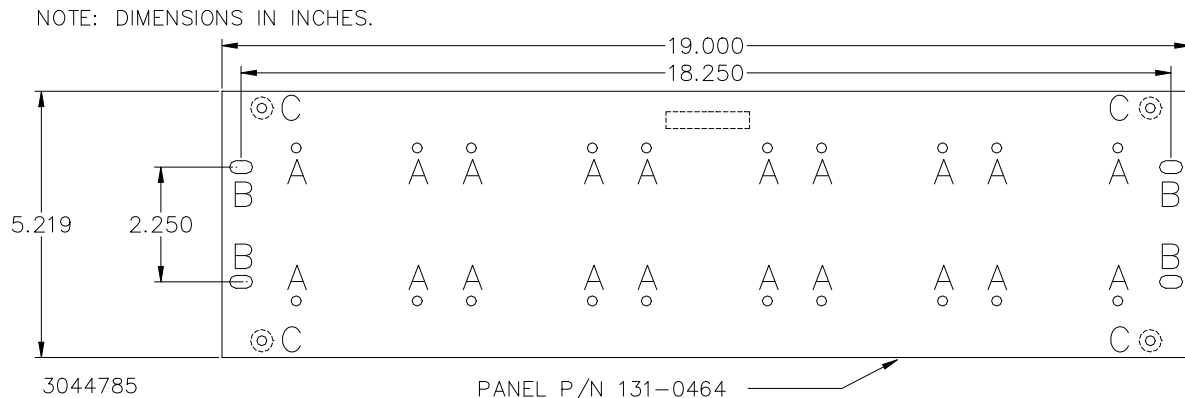


FIGURE 1. RACK ADAPTER RA 17-5